




MQR2-S12 尺寸图 2进2出, M5牙 + 12路信号(2A)

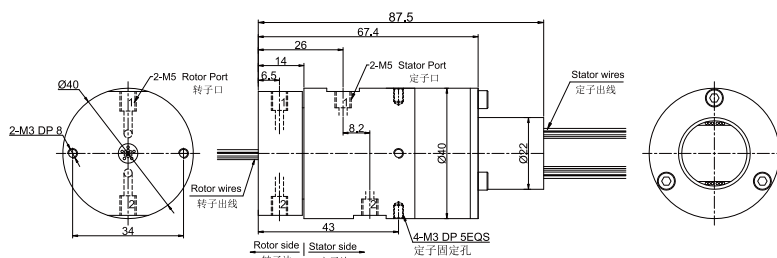


MQR2-S24 尺寸图 2进2出, M5牙 + 24路信号(2A)

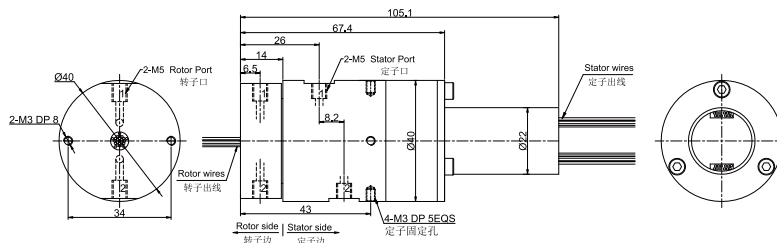


MQR4 尺寸图 4进4出, M5牙

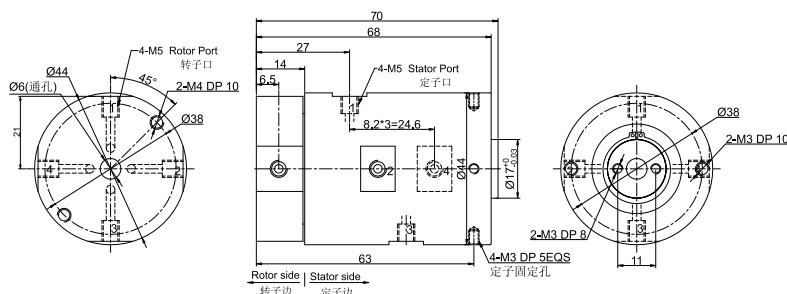

MQR4-S12 尺寸图 4进4出, M5牙 + 12路信号(2A)

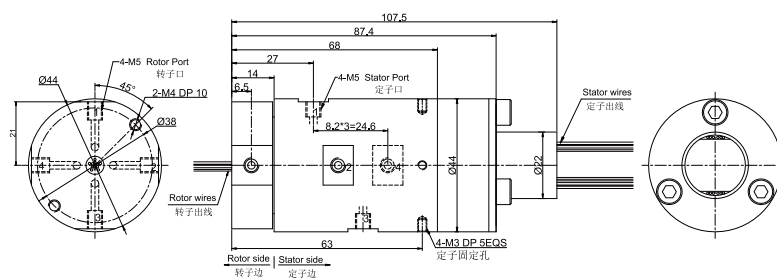

MQR4-S24 尺寸图 4进4出, M5牙 + 24路信号(2A)

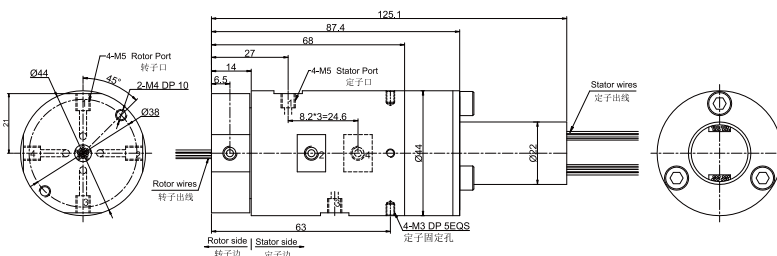

[illegible]

Technical drawing of the motor assembly showing front, side, and end views with dimensions and labels.

Dimensions:

- 144.1 (Total length)
- 106.4 (Length to stator port)
- 104 (Length to stator port)
- 29 (Distance between ports)
- 15 (Distance from rotor port to center)
- 7 (Distance from stator port to center)
- 8.2*5=41 (Distance from stator port to center)
- 82 (Distance from rotor port to center)
- 38.6 (Distance from stator port to center)
- 34.4 (Distance from stator port to center)
- 32.2 (Distance from stator port to center)

Labels:

- 6-M5 Rotor Port 转子口
- 6-M5 Stator Port 定子口
- Rotor wires 转子出线
- Stator wires 定子出线
- 2-M4 DP-10
- 4-M3 DP SEQS 定子固定孔

Views:

- Front view (Top): Shows the rotor and stator ports, rotor wires, and stator wires.
- Side view (Middle): Shows the motor housing, stator port, and stator wires.
- End view (Right): Shows the motor housing, stator port, and stator wires.

[illegible]

Technical drawing of the motor assembly, showing side and end views with dimensions and labels.

Side View Dimensions:

- Overall length: 159.1
- Stator core length: 121.4
- Stator core inner diameter: 119
- Stator core thickness: 29
- Stator core inner radius: 15
- Stator core outer radius: 7
- Stator core inner diameter: 6.2" $\approx$ 57.4
- Stator core outer diameter: 97
- Stator core inner diameter: 6.48
- Stator core outer diameter: 6.46
- Stator core inner diameter: 6.44
- Stator core outer diameter: 6.42

End View Dimensions:

- Overall diameter: 122.5
- Stator core inner diameter: 6.48
- Stator core outer diameter: 6.46
- Stator core inner diameter: 6.44
- Stator core outer diameter: 6.42

Labels:

- 8-M5 Rotor Port 转子口
- 8-M5 Stator Port 定子口
- Rotor wires 转子出线
- 2-M4 DP DP 10
- Stator wires 定子出线
- 4-M5 DP 5EQ5 定子固定孔
- Rotor side 转子侧
- Stator side 定子侧

Technical drawing of the motor assembly showing front, side, and detail views with dimensions and labels.

Front View (Left): Shows the rotor and stator ports. Labels include: 12-M5 Rotor Port 转子口, 8-M3 定子口, 45°, Ø40, Ø6(通孔), Ø48, 14.6, 29.5, 85, 92.5, 149, 152.

Side View (Middle): Shows the motor housing. Labels include: 12-M5 Stator Port 定子口, 8-M3 DP 5EQS 定子固定孔, 79, 144, 152, 149, 92.5, 85, 29.5, 14.6, 8.2*5=41, Ø48, Ø16.5, 4-M3 DP 5EQS 定子固定孔.

Detail View (Right): Shows the rotor and stator ports. Labels include: Ø33, 4-M3 定子口, Ø40, Ø6(通孔), Ø48, 14.6, 29.5, 85, 92.5, 149, 152.

Labels: 12-M5 Rotor Port 转子口, 8-M3 定子口, 12-M5 Stator Port 定子口, 8-M3 DP 5EQS 定子固定孔, 4-M3 DP 5EQS 定子固定孔, 4-M3 定子口.

Dimensions: 152, 149, 92.5, 85, 29.5, 14.6, 8.2*5=41, 79, 144, Ø48, Ø40, Ø6(通孔), Ø33, Ø16.5.

[illegible][illegible]

Technical drawing of the motor assembly, showing front and side views with dimensions and labels.

Front View (Left):

- 16-M5 Rotor Port 转子口
- Ø6 (通孔)
- Ø36
- 16-M5 Stator Port 定子口
- Ø33
- 4-M3 (通孔)

Side View (Right):

- 190.4
- 187.4
- 113.4
- 104.4
- 34.5
- 13.5
- 13.5
- 8.2"=57.4
- 8.2"=57.4
- Ø15_{max}
- 100
- 182.4
- 1-M3 DP SEQS 定子固定孔
- 1-M3 DP SEQS 定子固定孔

Labels:

- Rotor side | 定子 side

